

[Back to index](#)


# EQUIPMENT INFORMATION SHEET

[Notes and Abbreviations](#)

## PHARMACY

[Link to PDF file](#)

ITEM #	QTY		MODEL #	ITEM DESCRIPTION	MANUFACTURER	CONTRACTOR INFORMATION			REMARKS	UTILITY INFORMATION		
	EXT	NEW				I	F	C		ELECTRICAL	MECHANICAL: SUPPLY	MECHANICAL: WASTE
RX141-100			SP 100	ScriptPro SP100	ScriptPro	VND		EC	Vendor to install. EC to provide power.			



### EQUIPMENT CELL INFORMATION

Date created:	2/10/2009
Date revised:	
Cell library:	layout_hardlines.cel
Cell name(s):	HLRX141-100

### Special CAD Instructions:

ITEM NUMBER:	RX141-100
--------------	-----------


# SP 100™ with Open Control Center *Robotic Prescription Dispensing System*

ScriptPro's SP 100 automates the repetitive, manual dispensing tasks most subject to human error.

The SP 100 interfaces with the pharmacy computer system to fill, label, and deliver up to 150 prescriptions per hour. The system contains 100 universal dispensing cells, which are easily calibrated by pharmacy staff on-site. It also has two vial dispensers and a control center, which is available in three sizes to fit your pharmacy needs. The SP 100 dispenses tablets and capsules of all shapes and sizes into standard pharmacy vials. Because the system fills directly from the dispensing cells, there is no drug cross-contamination. The SP 100 also prints and applies the prescription and auxiliary labels, and delivers uncapped vials for final inspection and on-screen drug image verification.



Barcodes are used throughout the process for accuracy and quality control. Pharmacy staff manages the dispensing process from prescription entry to approval of the finished product.

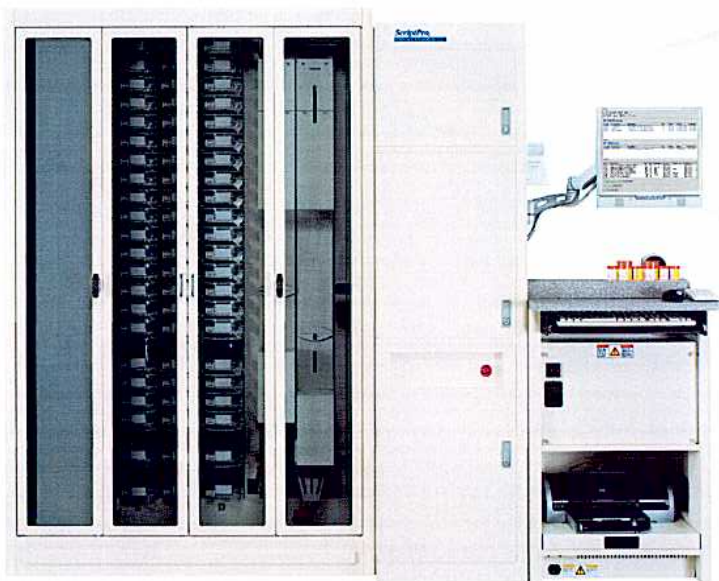


**ScriptPro®**

**Pharmacy Automation**


For more information call: 800.606.7628 • 913.384.1008 • [www.scriptpro.com](http://www.scriptpro.com)

# SP 100™ with Open Control Center


Top View

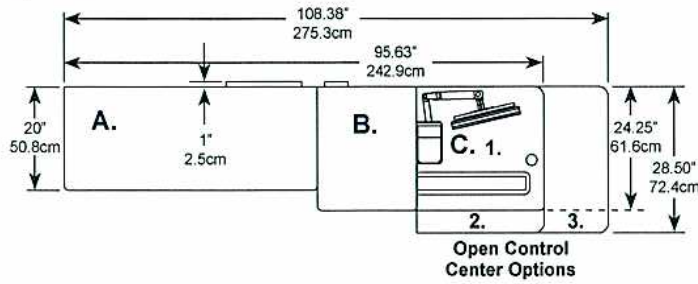

Front View

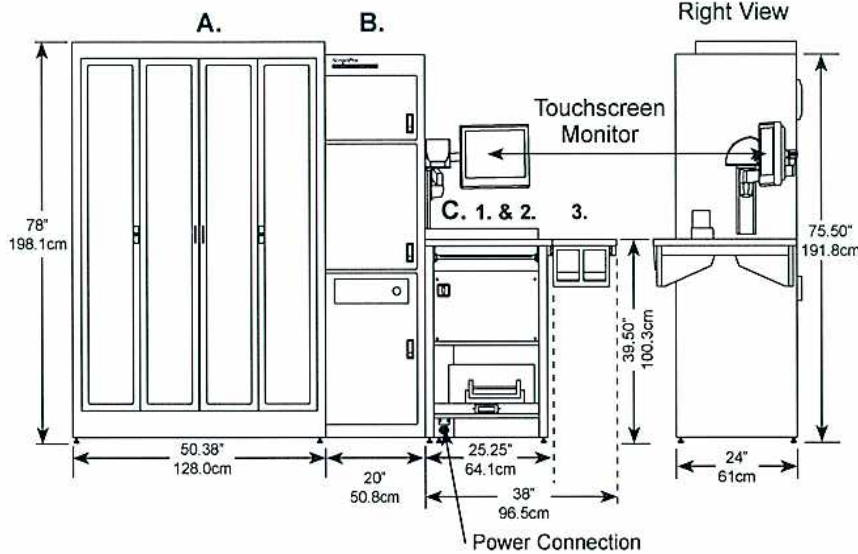

Back View

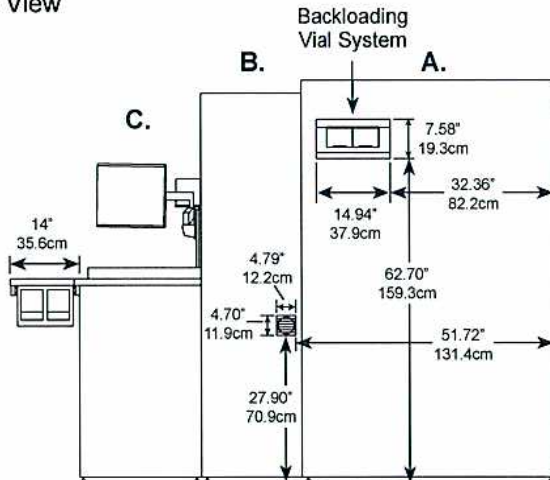

## Specifications\*

### Weight:

- A. Robotics Cabinet: 678 lbs (307.5 kg)
- B. Electrical Cabinet: 321 lbs (145.6 kg)
- C. Open Control Center:
  1. 172 lbs (78 kg)
  2. 176 lbs (79.8 kg)
  3. 220 lbs (99.8 kg)

### Robot Footprints:

1. 14.8 sq. ft. (1.37m<sup>2</sup>)
2. 15.6 sq. ft. (1.45m<sup>2</sup>)
3. 17.8 sq. ft. (1.65m<sup>2</sup>)

### Electrical Input: North American specs.

International specs available upon request.  
 120 VAC ±10%, 60 Hz, 5.7 AMP, 1 Phase  
 Dedicated outlet located within 5 feet (1.5m) of power connection.

Communications: Serial, parallel or ethernet pharmacy computer connection. Firewall provided for network connectivity.

### Remote Support Requirements:

1. VPN over high-speed Internet connection. Also requires access to backup telephone line as specified in #2 below, such as a fax line.
- OR
2. Modem-Dedicated analog RJ-11 telephone outlet accessible to outside line and capable of sending and receiving calls.

Barcode Scanner - Caution: Class IIa Laser Product. Do not stare into beam. 650nm visible laser light diode - .663 mW maximum output.

Computer/Software: Client/Server system on ScriptPro-installed network; Pentium IV-class PC's with dual IDE drives. TCP/IP socket connections; Software built with Visual C++; Windows XP/MSDE. Redundant data and transaction log backups. Customer access limited to SP Central user interface.

### Temperatures:

Operating: 41°F to 86°F (5°C to 30°C)  
 Storage: 5°F to 104°F (-15°C to 40°C)  
 Dissipated Heat: 1600 BTU/HR max

### Cell Capacity:

Single Cell: 676 cc/183 dram  
 Extended Cell: 1900 cc/514 dram

### Peripheral Products Supported:

Wireless Scanner (one per unit)

ANSI Barcode Print Quality Grade: B

Sound Level: 77 db at front edge of Control Center



\*Specifications subject to change without notice.

**ScriptPro®**

**Pharmacy Automation**